


MONIKAAVINPYSTYVÄLPPÄ FW

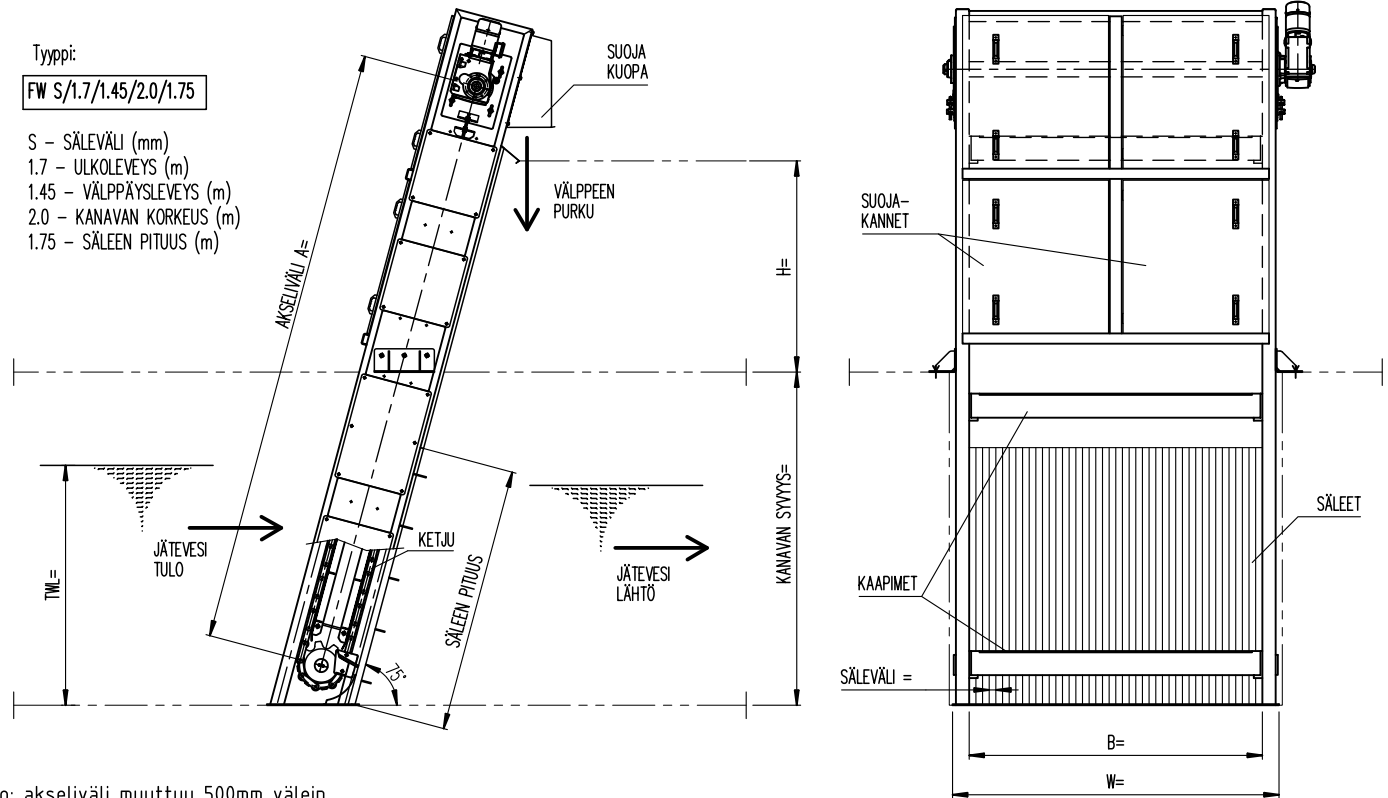

Huomio: akseliväli muuttuu 500mm välein.

TYYPPI FW-	Säleväli S [mm]	Max vesikorkeus TWL [mm]	Välppäysleveys B [mm]	Laitteiston leveys W [mm]	Purukorkeus h [mm]	Min akseliväli A [mm]	Kapasiteetti [m ³ /h]
S/1.25/1.0/1.0/0.8	10-50	800	1000	1250	1100-1600	2500	1700-2800
S/1.25/1.0/1.5/1.3	10-50	1200	1000	1250	1100-1600	3000	2600-4200
S/1.25/1.0/1.8/1.6	10-50	1500	1000	1250	1100-1600	3000	3200-5300
S/1.45/1.2/1.5/1.3	10-50	1200	1200	1450	1100-1600	3000	3100-5100
S/1.45/1.2/1.8/1.6	10-50	1500	1200	1450	1100-1600	3000	3900-6400
S/1.45/1.2/2.0/1.8	10-50	1700	1200	1450	1100-1600	3500	4400-7200
S/1.75/1.5/1.5/1.3	10-50	1200	1500	1750	1100-1600	3000	3900-6400
S/1.75/1.5/1.8/1.6	10-50	1500	1500	1750	1100-1600	3000	4900-8000
S/1.75/1.5/2.0/1.8	10-50	1700	1500	1750	1100-1600	3500	5500-9000
S/1.75/1.5/2.5/2.3	10-50	2200	1500	1750	1100-1600	3500	7100-11600
S/2.45/2.2/2.5/2.3	10-50	2200	2200	2450	1100-1600	3500	10500-17000

HUOM: Mitat ja arvot ohjellisia. Varaamme oikeudet teknisiin muutoksiin.